

SHERA™

build better, live better

SHERA

Installation Manual



Index

***SHERA* Board**

Floor Installation , Wall Installation	01
Wall Installation, Movement and Piling	02

***SHERA* Wood**

Ceiling Application

Installation Steps : <i>SHERA</i> Uncolored Strip	03
Installation Steps : <i>SHERA</i> Colored Strip	04
Installation Steps : <i>SHERA</i> Ceiling Skirt	05

Wall Application

Installation Steps : <i>SHERA</i> Uncolored Plank	06
Installation Steps : <i>SHERA</i> Colored Plank	07
Installation Steps : <i>SHERA</i> Uncolored Splendid Plank	08
Installation Steps : <i>SHERA</i> Colored Strip	09

Floor Application

Installation Steps : <i>SHERA</i> Colored and Pre-primed Floor Plank	10
Installation Steps : <i>SHERA</i> Floor Plank Color Through	11
Installation Steps : <i>SHERA</i> Stair	12
Installation Steps : <i>SHERA</i> Skirt	13

Decorative Application

Installation Steps : <i>SHERA</i> Fence	14
Installation Steps : <i>SHERA</i> Uncolored Deco Wood	15

Roof Application

Installation Steps : <i>SHERA</i> Uncolored Eaves	16
Installation Steps : <i>SHERA</i> Colored Eaves Pro	17
Installation Steps : <i>SHERA</i> Colored Eaves One Plus	18
Installation Steps : <i>SHERA</i> Eaves Filler Unit	19




Technical Specification

20

Installation Guides

Floor Installation

Finishing Materials : carpet, ceramic tile, rubber tile, engineered wood and laminate

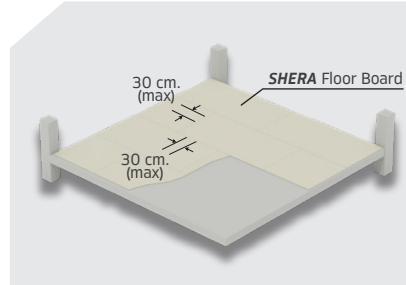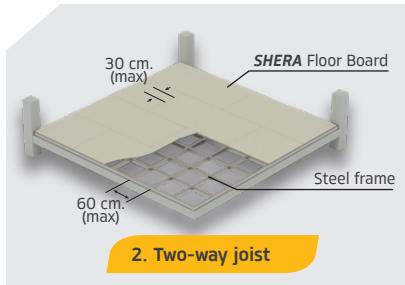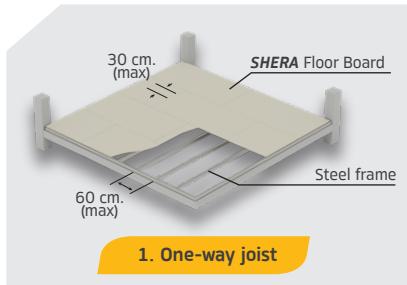

Elevated floor installation

SHERA Board Product

Square-cut edge, 15-20 mm. thick

Type of frame

Structural steel frame : with a minimum thickness of 2.3 mm.

Hardwood frame : with a minimum dimensions of 1 1/2 x 3 inches

Joint Spacing

One-way joist at every 60 cm.

Two-way joist at 60 x 60 cm.

Joint Spacing

One-way joist at every 60 cm.

Two-way joist at 60 x 60 cm.

Fixing distance

At every 30 cm. with 1.2 cm. distance from the board's edge and 5 cm. from the corner

Painting

Apply epoxy for indoor application.

Apply polyurethane for indoor and outdoor application.

Sub-floor board installation on existing concrete floor

SHERA Board Product

Square-cut edge, 8-12 mm. thick

Board fixing tools




Use cement adhesive or polyurethane adhesive with hammer and 1-1.5" concrete nails.

Fixing distance

At every 30 cm. with 1.2 cm. distance from the board's edge and 5 cm. from the corner

Wall installation

Finishing Materials : wallpaper, tile, laminate

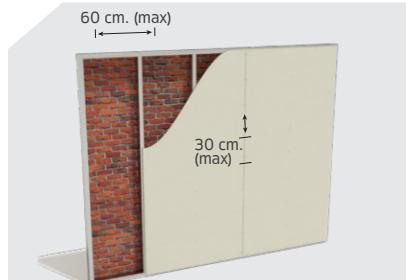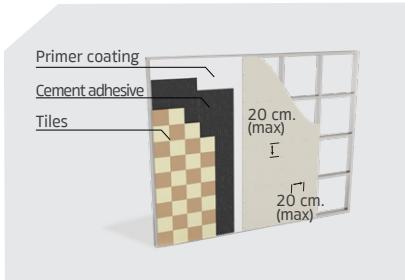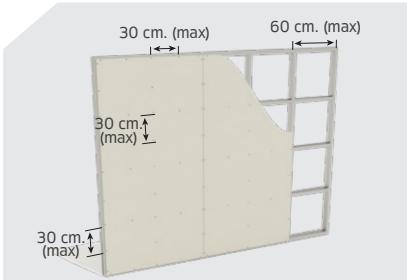

General wall application

SHERA Board Product

Square-cut edge, 6-12 mm. thick for v-groove wall

Recessed edge, 6-12 mm. thick* for smooth finished wall

Type of frame

U75 and C75 galvanized frame with a minimum thickness of 0.55 mm.

Joint spacing

60 x 60 cm. or 60 x 120 cm.

Fixing distance

At every 30 cm. with 1.2 cm. distance from the board's edge and 5 cm. from the corner

* Recessed edge profile 10-12 mm. thick is a made to order item

Tile wall installation

SHERA Board Product

Square-cut edge, 10-12 mm. thick

Type of frame

U75 and C75 galvanized frame with a minimum thickness of 0.55 mm.

Joint spacing

60 x 60 cm.

Fixing distance

At every 20 cm. with 1.2 cm. distance from the board's edge and 5 cm. from the corner

Ceramic tile fixing tool

Cement adhesive

Brick wall installation alternative to plaster

SHERA Board Product

Square-cut edge, 6-12 mm. thick

Recessed edge, 6-8 mm. thick for interior smooth finished wall

Type of frame

C-Line galvanized frame no. 24, 0.55 mm. thick


Joint spacing

at every 60 cm. with vertical joint attached to bracket such as BPB ML75

Fixing distance

At every 30 cm. with 1.2 cm. distance from the board's edge and 5 cm. from the corner

Ceiling installation

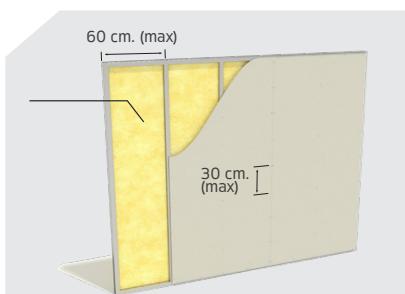

Sound or thermal insulated wall installation

SHERA Board Product

Square-cut edge, 6-12 mm. thick

Type of frame

U75 and C75 galvanized frame with a minimum thickness of 0.55 mm.

Joint spacing


60 X 240 mm.

Fixing distance

At every 30 cm. with 1.2 cm. distance from the board's edge and 5 cm. from the corner

Mid-layer material

Sound or thermal insulation

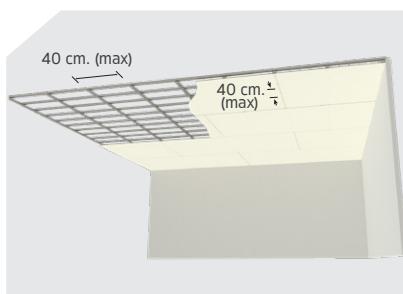

Steel frame installation

SHERA Board Product

Square-cut edge, 3.2-6 mm. thick for v-groove ceiling

Recessed edge, 6 mm. thick for smooth finished ceiling

Type of frame


C-Line galvanized frame no. 24

Joint spacing

Main section at every 90 cm.
Cross section at every 40 cm.

Fixing distance

At every 30 cm. with 1.2 cm. distance from the board's edge and 5 cm. from the corner

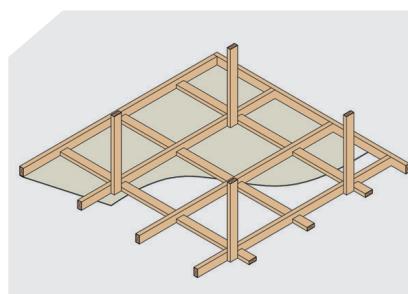

Timber frame installation

SHERA Board Product

Square-cut edge, 3.2-6 mm. thick for v-groove ceiling

Recessed edge, 6 mm. thick for smooth finished ceiling

Type of frame

Hardwood frame with dimensions of 1 1/2 x 3 inches

Joint spacing


60 cm. x 60 cm.

Fixing distance

At every 30 cm. with 1.2 cm. distance from the board's edge and 5 cm. from the corner


Tip on fixing the corners of SHERA Floor, Wall, Ceiling Board

Fix the screw at 1.2 cm. edge distance, with 5 cm. distance from the board's corner

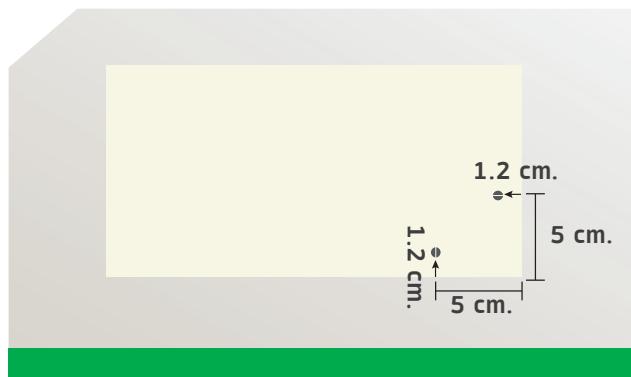

Movement and Piling

Always raise the board vertically by raising the two ends

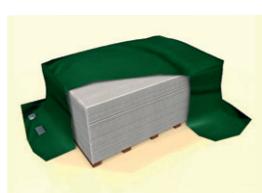

Pile the boards up at shady and on the flat and dry ground. The boards should be supported by 5 pieces of wood of 1.5"x3" wide as indicated in the schedule. Do not install and paint the board in wet condition.


Thickness (mm.)	Piling not exceeding (pcs)
4	300
6	225
8	150
10	120
12	105
15	90
18	75
20	60

Installation Guides


Ceiling Application

Installation Steps


SHERA Uncolored Strip

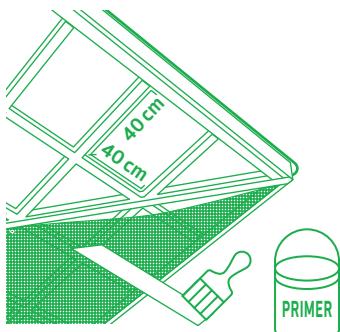

- 1 Install steel studs spacing not more than 40 cm. apart and lay down the insect protection net.
- 2 Prime uncolored *SHERA* Strip prior to installation.

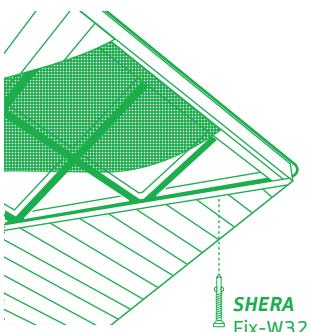


- 3 Fasten *SHERA* Strip to steel studs with screw at the middle from long-side edges.

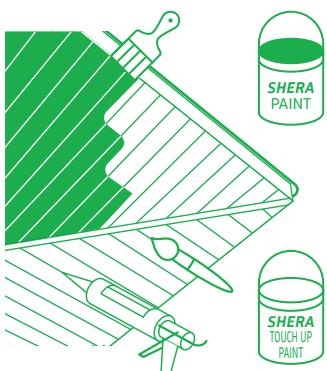


- 4 Caulk at all end joints and over the screw heads.
For Uncolored *SHERA* Strip
Clean up before painting.
For Colored *SHERA* Strip
Touch up the screw head after installed.

Handling & storage

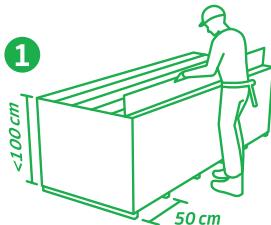

SHERA products should be handled and stacked carefully to avoid damages to their edges and corners.

The maximum height of stack is 1 meter with timber bearers supported at every 50 cm.

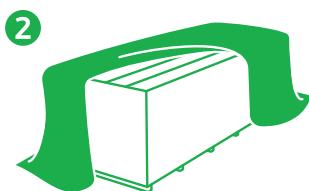

SHERA products should be stacked on dry and leveled ground.

It is recommended to store *SHERA* under shade to prevent damages that could occur to the product in case of prolonged exposure to high humidity environment prior to installation.




During a transfer, *SHERA* products should be handled at 50 cm. from both ends.


The product should be lifted such that its side is parallel to the floor.

Avoid installing *SHERA* product under wet condition to reduce chance of cracking.

Installation Steps *SHERA Colored Strip*

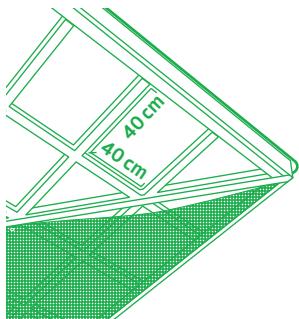

1 Install steel studs spacing not more than 40 cm. apart and lay down the insect protection net.

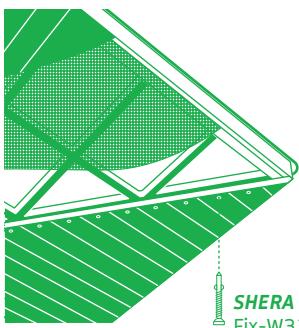


2 Fasten *SHERA* Strip to steel studs with screw at the middle from long-side edges.



3 Caulk at all end joints and over the screw heads. Apply touch-up paint over the screw head.

Handling & storage

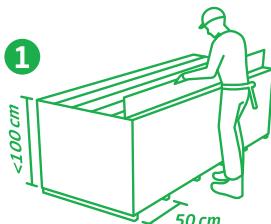

SHERA products should be handled and stacked carefully to avoid damages to their edges and corners.

The maximum height of stack is 1 meter with timber bearers supported at every 50 cm.



SHERA products should be stacked on dry and leveled ground.

It is recommended to store *SHERA* under shade to prevent damages that could occur to the product in case of prolonged exposure to high humidity environment prior to installation.




During a transfer, *SHERA* products should be handled at 50 cm. from both ends.

The product should be lifted such that its side is parallel to the floor.


Avoid installing *SHERA* product under wet condition to reduce chance of cracking.

Installation Steps

SHERA Ceiling Skirt

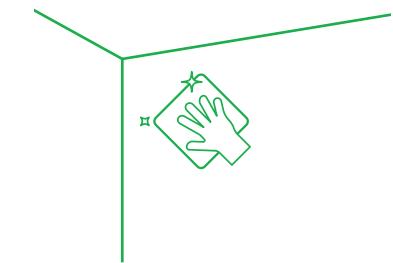

1 Clean up the product surface.

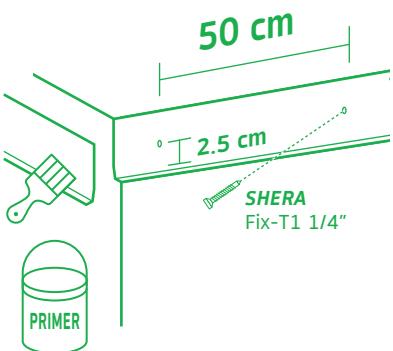


2 Prime uncolored *SHERA* Ceiling Skirt prior to installation.

3 Festened *SHERA* Ceiling Skirt with screws at the middle from long-side edges, every 50 cm.




4 Caulk over the screw heads and clean up before painting.

Handling & storage

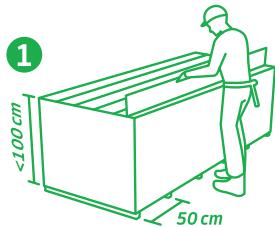

SHERA products should be handled and stacked carefully to avoid damages to their edges and corners.

The maximum height of stack is 1 meter with timber bearers supported at every 50 cm.

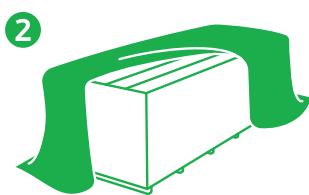

SHERA products should be stacked on dry and leveled ground.

It is recommended to store *SHERA* under shade to prevent damages that could occur to the product in case of prolonged exposure to high humidity environment prior to installation.



During a transfer, *SHERA* products should be handled at 50 cm from both ends.

The product should be lifted such that its side is parallel to the floor.


Avoid installing *SHERA* product under wet condition to reduce chance of cracking.

Installation Guides

Wall Application


Installation Steps

SHERA Uncolored Plank

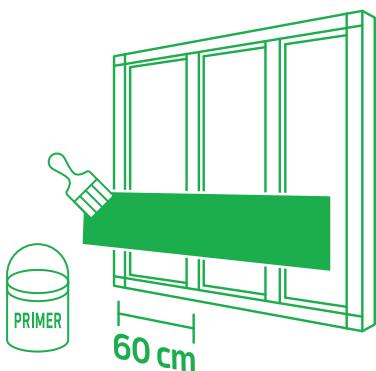

1 Install steel studs spacing not more than 60 cm apart

2 Prime uncolored *SHERA* Plank prior to installation.

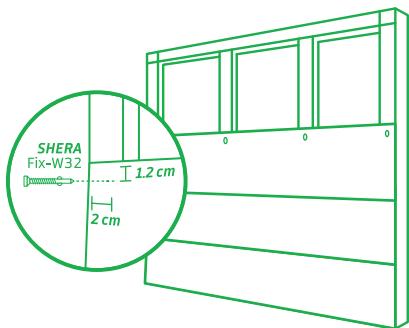

3 Fasten the plank to steel studs, with one on top of the other, from bottom of the wall to the top.


Recommended overlapping length is 2.5 cm and place the first plank with ground clearance of 2-5 cm to avoid direct contact with damp or water.



4 Caulk at all end joints and the corners of wall.

Clean up the plank before painting.

Handling & storage

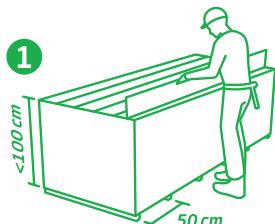

SHERA products should be handled and stacked carefully to avoid damages to their edges and corners.

The maximum height of stack is 1 meter with timber bearers supported at every 50 cm.



SHERA products should be stacked on dry and leveled ground.

It is recommended to store *SHERA* under shade to prevent damages that could occur to the product in case of prolonged exposure to high humidity environment prior to installation.




During a transfer, *SHERA* products should be handled at 50 cm. from both ends.


The product should be lifted such that its side is parallel to the floor.

Avoid installing *SHERA* product under wet condition to reduce chance of cracking.

Installation Steps *SHERA* Colored Plank

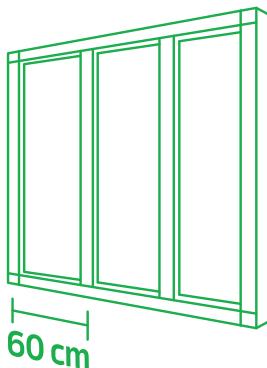


1 Install steel studs spacing not more than 60 cm. apart.

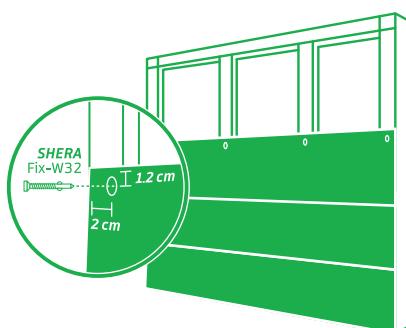


2 Fasten colored *SHERA* Plank to the steel studs with one on top of the other, from bottom of the wall to the top.

Recommended overlapping length is 2.5 cm and place the first plank with ground clearance of 2-5 cm to avoid direct contact with damp or water.

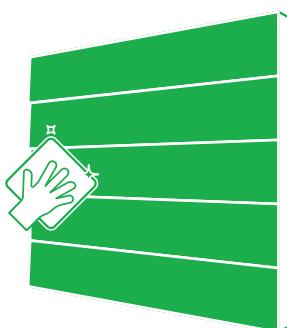


3 Caulk at all end joints and the corners of wall. Clean up the plank after installed.

Handling & storage

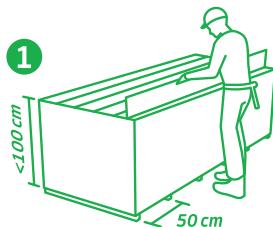

SHERA products should be handled and stacked carefully to avoid damages to their edges and corners.

The maximum height of stack is 1 meter with timber bearers supported at every 50 cm.

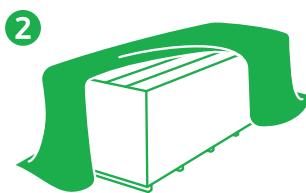

SHERA products should be stacked on dry and leveled ground.

It is recommended to store *SHERA* under shade to prevent damages that could occur to the product in case of prolonged exposure to high humidity environment prior to installation.




During a transfer, *SHERA* products should be handled at 50 cm. from both ends.

The product should be lifted such that its side is parallel to the floor.

Avoid installing *SHERA* product under wet condition to reduce chance of cracking.


Installation Steps

SHERA Uncolored Splendid Plank

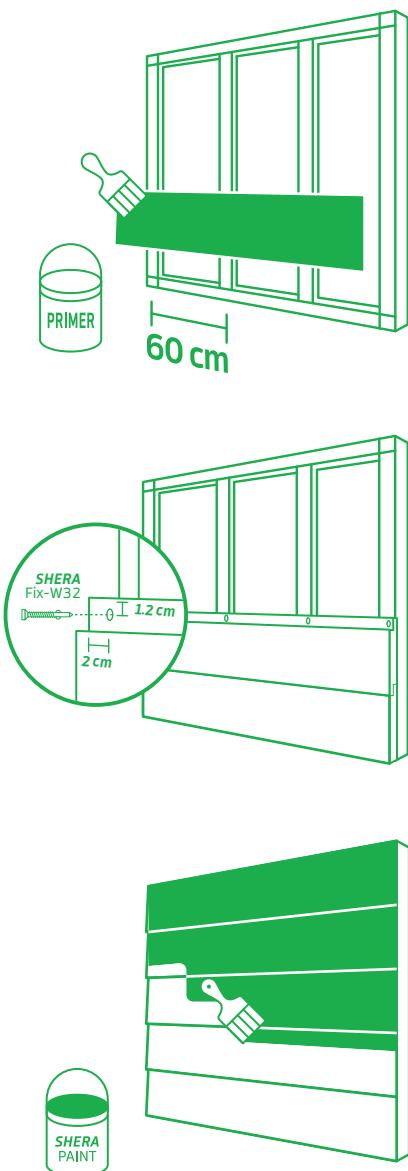


- 1 Install steel studs spacing not more than 60 cm. apart.
- 2 Prime uncolored *SHERA* Splendid Plank prior to installation.
- 3 Lay up the plank such that the tongues point toward the direction of installation. Fasten the plank to the steel studs. Cover the tongues with the next grooved edge next grooved edge of the plank to hide the screw heads. Recommended placing the first splendid plank with ground clearance of 2-5 cm to avoid direct contact with damp or water.
- 4 Caulk at all end joints and the corners of wall. Clean up the plank before painting.

Handling & storage

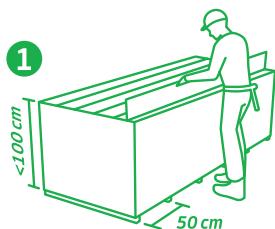

SHERA products should be handled and stacked carefully to avoid damages to their edges and corners.

The maximum height of stack is 1 meter with timber bearers supported at every 50 cm.

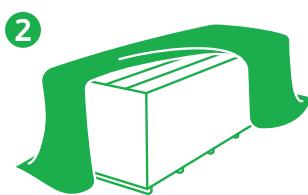

SHERA products should be stacked on dry and leveled ground.

It is recommended to store *SHERA* under shade to prevent damages that could occur to the product in case of prolonged exposure to high humidity environment prior to installation.




During a transfer, *SHERA* products should be handled at 50 cm. from both ends.


The product should be lifted such that its side is parallel to the floor.

Avoid installing *SHERA* product under wet condition to reduce chance of cracking.

Installation Steps *SHERA Colored Strip*

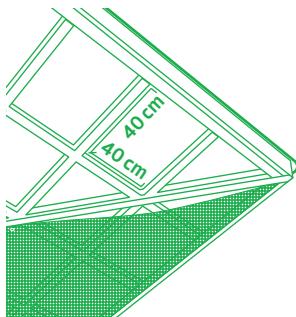

1 Install steel studs spacing not more than 40 cm. apart and lay down the insect protection net.

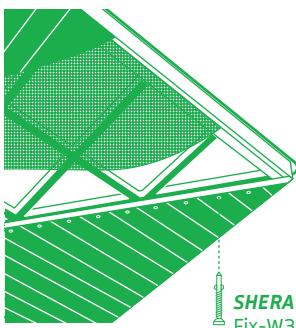


2 Fasten *SHERA* Strip to steel studs with screw at the middle from long-side edges.




3 Caulk at all end joints and over the screw heads.
Apply touch-up paint over the screw head.

Handling & storage

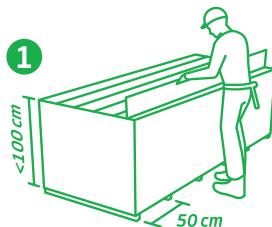

SHERA products should be handled and stacked carefully to avoid damages to their edges and corners.

The maximum height of stack is 1 meter with timber bearers supported at every 50 cm.

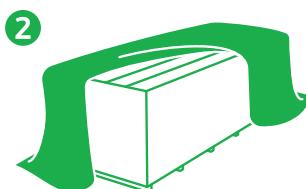

SHERA products should be stacked on dry and leveled ground.

It is recommended to store *SHERA* under shade to prevent damages that could occur to the product in case of prolonged exposure to high humidity environment prior to installation.



During a transfer, *SHERA* products should be handled at 50 cm. from both ends.

The product should be lifted such that its side is parallel to the floor.




Avoid installing *SHERA* product under wet condition to reduce chance of cracking.

Installation Guides

Wall Application

Installation Steps

and Pre-primed Floor Plank

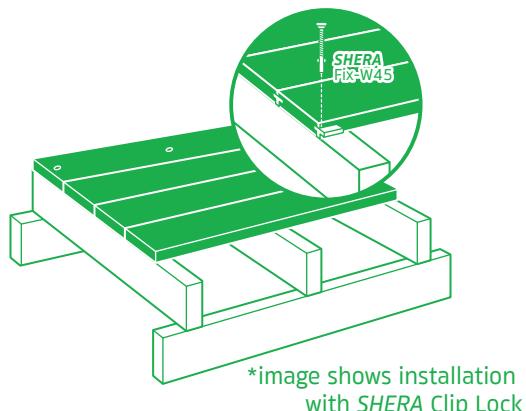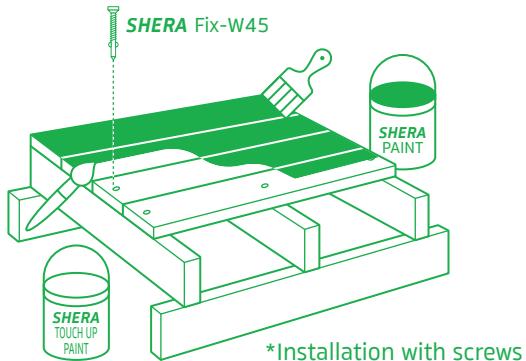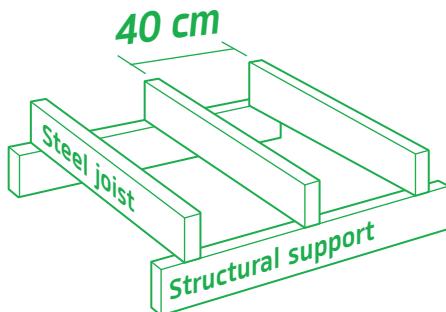

1 Install structural supports perpendicular with *SHERA* Floor Plank's direction spacing not more than 40 cm apart.

2 Fasten *SHERA* Floor Plank with screw at at 1.2 cm. from the long-side edges and 1-2 cm. from both wide-side edges.

3 Caulk the screw heads before applying touch-up paints for colored floor plank.


For Pre-primed *SHERA* Floor Plank, make sure the surface is cleaned before applying decking paint.

4 For Clip-lock *SHERA* Floor Plank series, fasten the first plank to steel stud with screw at 5 cm. from the edge.

Align *SHERA* Clip-Lock to the other side of the plank with one of its wing slotted into the plank's groove.


Screw the clip-lock to the steel studs holding the plank in place.

Handling & storage

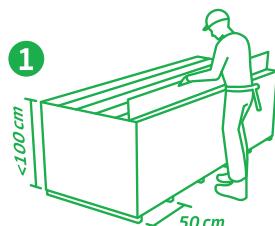

SHERA products should be handled and stacked carefully to avoid damages to their edges and corners.

The maximum height of stack is 1 meter with timber bearers supported at every 50 cm.

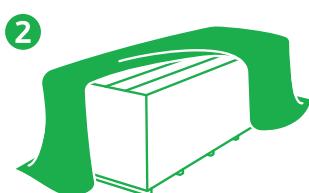

SHERA products should be stacked on dry and leveled ground.

It is recommended to store *SHERA* under shade to prevent damages that could occur to the product in case of prolonged exposure to high humidity environment prior to installation.




During a transfer, *SHERA* products should be handled at 50 cm. from both ends.

The product should be lifted such that its side is parallel to the floor.


Avoid installing *SHERA* product under wet condition to reduce chance of cracking.

Installation Steps

SHERA Colorthrough Floor Plank

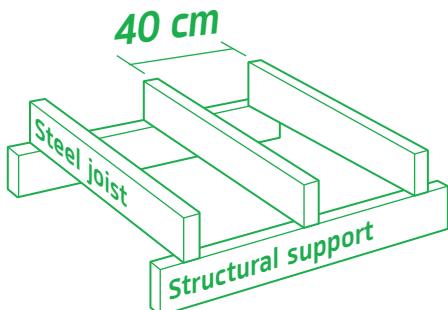


1 Install structural supports perpendicular with SHERA Floor Plank's direction spacing not more than 40 cm apart.

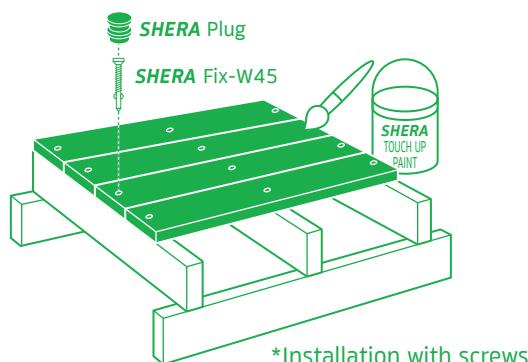


2 Fasten SHERA Floor Plank with screw at at 1.2 cm. from the long-side edges and 1-2 cm. from both wide-side edges.

3 Cover any mark with touch-up paints and screw head with SHERA Plug.

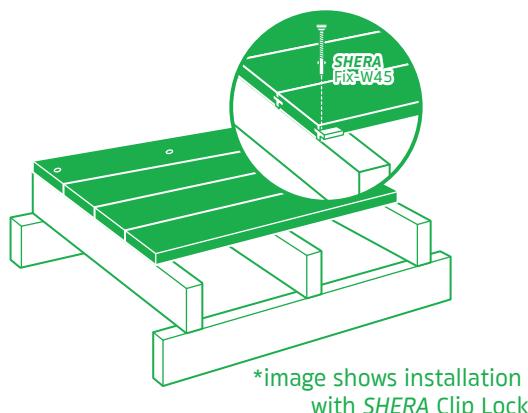


4 For Clip-lock SHERA Floor Plank series, fasten the first plank to steel stud with screw at 5 cm. from the edge. Align SHERA Clip-Lock to the other side of the plank with one of its wing slotted into the plank's groove. Screw the clip-lock to the steel studs holding the plank in place.

Handling & storage

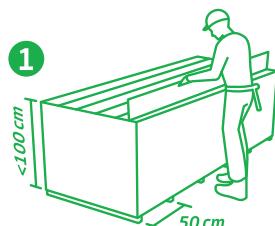

SHERA products should be handled and stacked carefully to avoid damages to their edges and corners.

The maximum height of stack is 1 meter with timber bearers supported at every 50 cm.

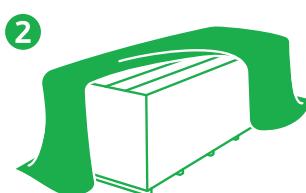

SHERA products should be stacked on dry and leveled ground.

It is recommended to store SHERA under shade to prevent damages that could occur to the product in case of prolonged exposure to high humidity environment prior to installation.




During a transfer, SHERA products should be handled at 50 cm. from both ends.


The product should be lifted such that its side is parallel to the floor.

Avoid installing SHERA product under wet condition to reduce chance of cracking.


Installation Steps *SHERA Stair*

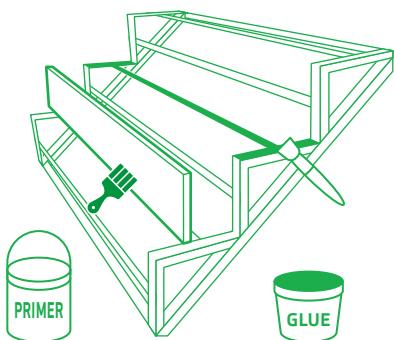

- 1 Install *SHERA Stair* on concrete slab or steel studs.

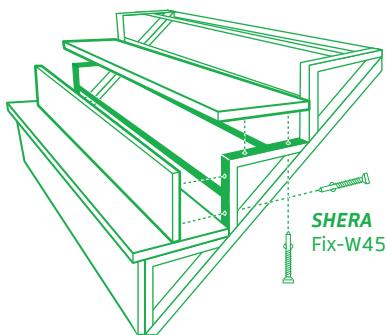


- 2 Prime all sides of uncolored *SHERA Stair* prior to installation and joint with *SHERA Bond*.
- 3 Fasten *SHERA Stair* to steel studs with screw.

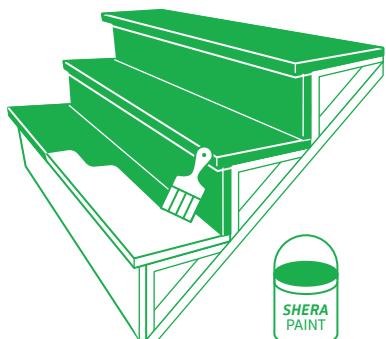


- 4 Caulk over the screw heads and clean up before painting.

Handling & storage

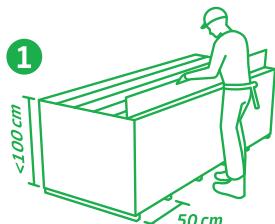

SHERA products should be handled and stacked carefully to avoid damages to their edges and corners.

The maximum height of stack is 1 meter with timber bearers supported at every 50 cm.

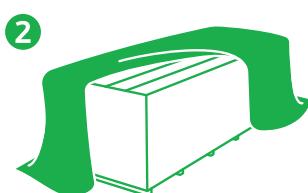

SHERA products should be stacked on dry and leveled ground.

It is recommended to store *SHERA* under shade to prevent damages that could occur to the product in case of prolonged exposure to high humidity environment prior to installation.




During a transfer, *SHERA* products should be handled at 50 cm from both ends.

The product should be lifted such that its side is parallel to the floor.


Avoid installing *SHERA* product under wet condition to reduce chance of cracking.

Installation Steps

SHERA Skirt

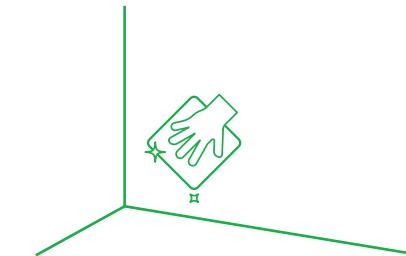


① Clean up the product surface.

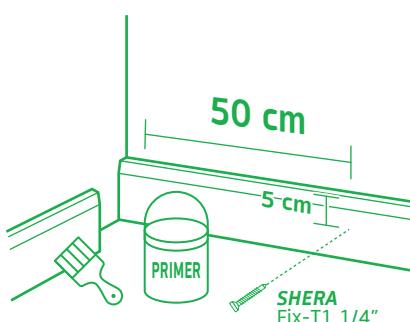


② Prime uncolored *SHERA Skirt* prior to installation.

③ Festened *SHERA Skirt* with screws at the middle from long-side edges, every 50 cm.

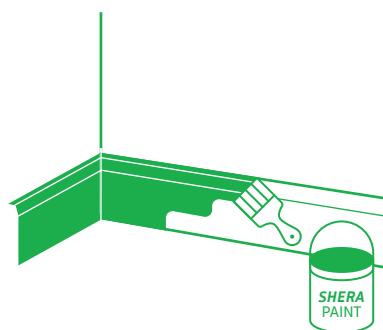


④ Caulk over the screw heads and clean up before painting.

Handling & storage

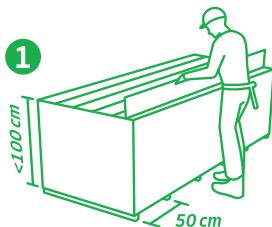

SHERA products should be handled and stacked carefully to avoid damages to their edges and corners.

The maximum height of stack is 1 meter with timber bearers supported at every 50 cm.

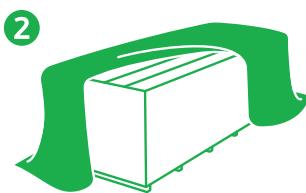

SHERA products should be stacked on dry and leveled ground.

It is recommended to store *SHERA* under shade to prevent damages that could occur to the product in case of prolonged exposure to high humidity environment prior to installation.



During a transfer, *SHERA* products should be handled at 50 cm from both ends.


The product should be lifted such that its side is parallel to the floor.

Avoid installing *SHERA* product under wet condition to reduce chance of cracking.


Installation Guides

Decorative Application


Installation Steps **SHERA Fence**

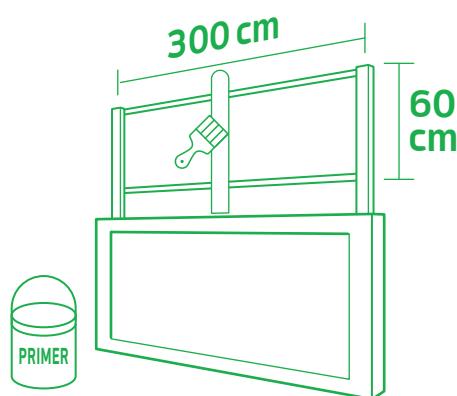

- 1 For vertical fences, install steel studs spacing not more than 60 cm apart and span length should not be more than 300 cm.

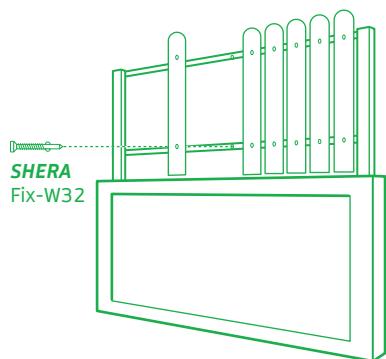


- 2 Prime uncolored SHERA Fence prior to installation.
- 3 Fasten SHERA Fence to steel studs with screw at the middle from long-side edges, every 50 cm.

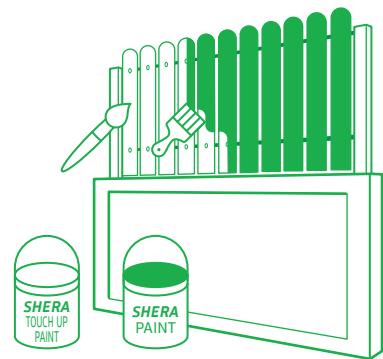


- 4 Caulk at all end joints and over the screw heads.
For uncolored SHERA Fence
Clean up before painting.
For colored SHERA Fence
Touch up the screw head after installed.

Handling & storage

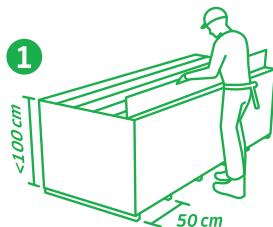

SHERA products should be handled and stacked carefully to avoid damages to their edges and corners.

The maximum height of stack is 1 meter with timber bearers supported at every 50 cm.

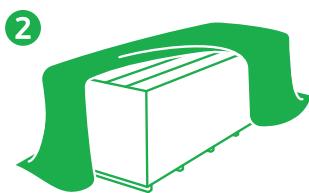

SHERA products should be stacked on dry and leveled ground.


It is recommended to store SHERA under shade to prevent damages that could occur to the product in case of prolonged exposure to high humidity environment prior to installation.




During a transfer, SHERA products should be handled at 50 cm from both ends.

The product should be lifted such that its side is parallel to the floor.

Avoid installing SHERA product under wet condition to reduce chance of cracking.

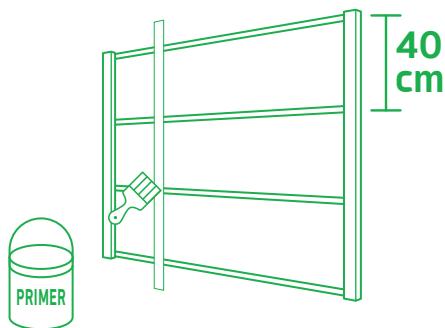

- 1 Install steel studs perpendicular with strip's direction spacing not more than 40 cm apart.

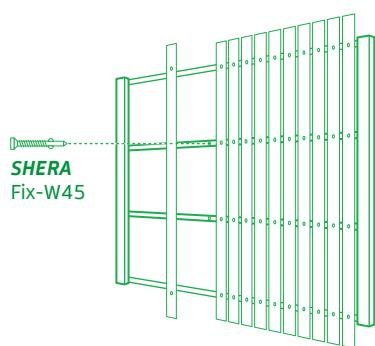


- 2 Prime uncolored *SHERA* Deco Wood prior to installation.
- 3 Fasten *SHERA* Deco Wood to steel studs with screw at the middle from long-side edges.




- 4 Caulk at all end joints and over the screw heads.
Clean up before painting.

Handling & storage

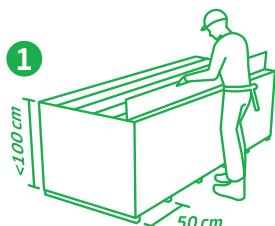

SHERA products should be handled and stacked carefully to avoid damages to their edges and corners.

The maximum height of stack is 1 meter with timber bearers supported at every 50 cm.

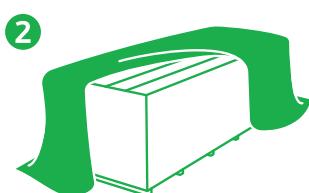

SHERA products should be stacked on dry and leveled ground.

It is recommended to store *SHERA* under shade to prevent damages that could occur to the product in case of prolonged exposure to high humidity environment prior to installation.



During a transfer, *SHERA* products should be handled at 50 cm from both ends.

The product should be lifted such that its side is parallel to the floor.


Avoid installing *SHERA* product under wet condition to reduce chance of cracking.

Installation Guides


Roof Application

Installation Steps


SHERA Uncolored Eaves

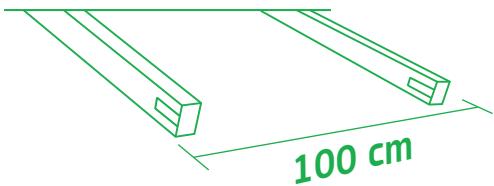

- 1 Install rafters spacing not more than 100 cm. apart.

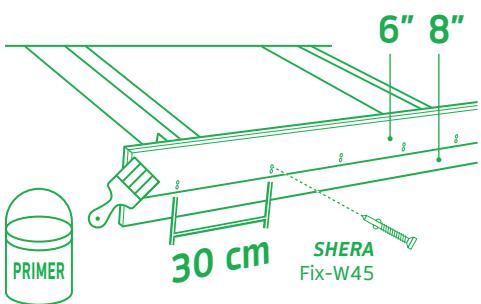


- 2 Prime uncolored *SHERA* Eaves prior to installation.
- 3 Fasten *SHERA* 8" Eaves to the steel studs. Lay *SHERA* 6" Eaves to partly cover *SHERA* 8" Eaves and screw the eaves together at every 30 cm.

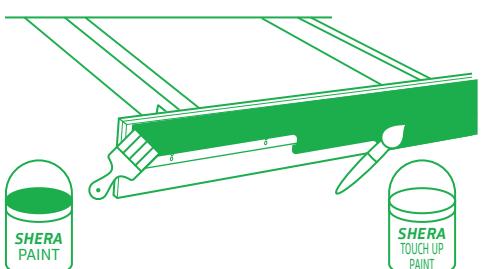


- 4 Caulk at all end joints and over the screw heads.
For Uncolored *SHERA* Eaves
Clean up before painting.
For Colored *SHERA* Eaves
Touch up the screw head after installed.

Handling & storage

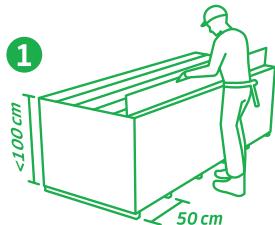

SHERA products should be handled and stacked carefully to avoid damages to their edges and corners.

The maximum height of stack is 1 meter with timber bearers supported at every 50 cm.

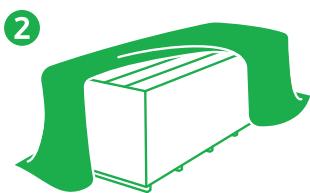

SHERA products should be stacked on dry and leveled ground.

It is recommended to store *SHERA* under shade to prevent damages that could occur to the product in case of prolonged exposure to high humidity environment prior to installation.




During a transfer, *SHERA* products should be handled at 50 cm from both ends.

The product should be lifted such that its side is parallel to the floor.


Avoid installing *SHERA* product under wet condition to reduce chance of cracking.

Installation Steps


SHERA Colored Eaves Pro

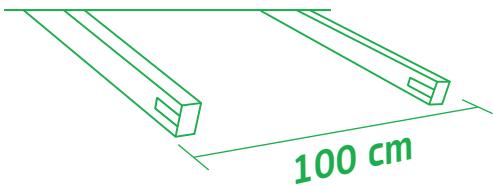

1 Install steel studs spaced not more than 100 cm apart.

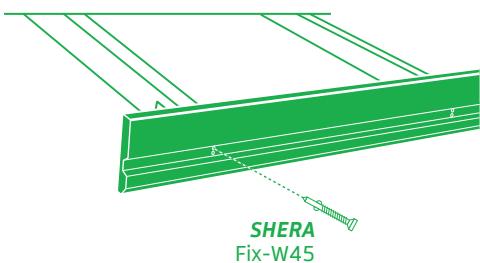


2 Fasten *SHERA Colored Eaves* to the steel studs with screw.

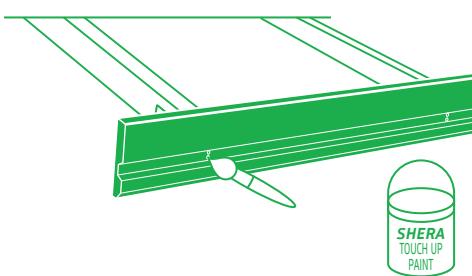


3 Caulk at all end joints and over the screw heads.
Touch up the screw head after installed.

Handling & storage

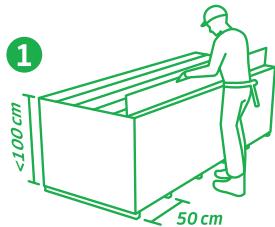

SHERA products should be handled and stacked carefully to avoid damages to their edges and corners.

The maximum height of stack is 1 meter with timber bearers supported at every 50 cm.

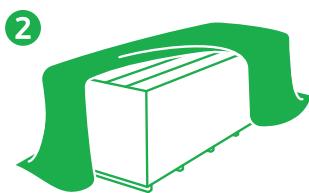

SHERA products should be stacked on dry and leveled ground.

It is recommended to store *SHERA* under shade to prevent damages that could occur to the product in case of prolonged exposure to high humidity environment prior to installation.




During a transfer, *SHERA* products should be handled at 50 cm from both ends.

The product should be lifted such that its side is parallel to the floor.


Avoid installing *SHERA* product under wet condition to reduce chance of cracking.

Installation Steps


SHERA Colored Eaves One Plus

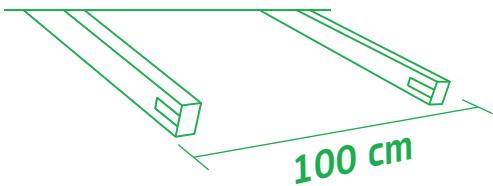

- 1 Install rafters spacing not more than 100 cm. apart.

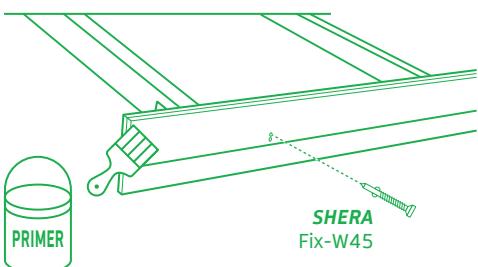

- 2 Prime uncolored *SHERA* Eaves prior to installation.
- 3 Fasten *SHERA* Eaves to the steel studs.

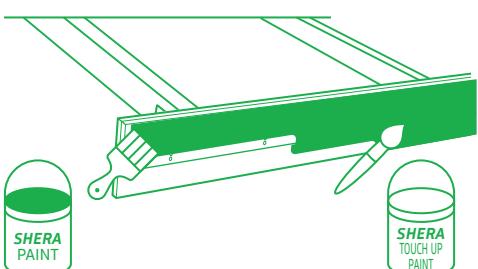

- 4 Caulk at all end joints and over the screw heads.


For Uncolored *SHERA* Eaves

Clean up before painting.

For Colored *SHERA* Eaves


Touch up the screw head after installed.

Handling & storage

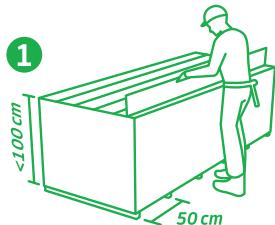

SHERA products should be handled and stacked carefully to avoid damages to their edges and corners.

The maximum height of stack is 1 meter with timber bearers supported at every 50 cm.

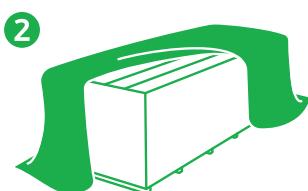

SHERA products should be stacked on dry and leveled ground.

It is recommended to store *SHERA* under shade to prevent damages that could occur to the product in case of prolonged exposure to high humidity environment prior to installation.




During a transfer, *SHERA* products should be handled at 50 cm. from both ends.

The product should be lifted such that its side is parallel to the floor.


Avoid installing *SHERA* product under wet condition to reduce chance of cracking.

Installation Steps


SHERA Eaves Filler Unit

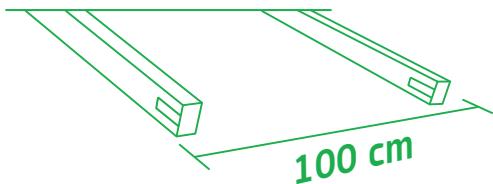

- 1 Install rafters spacing not more than 100 cm apart.

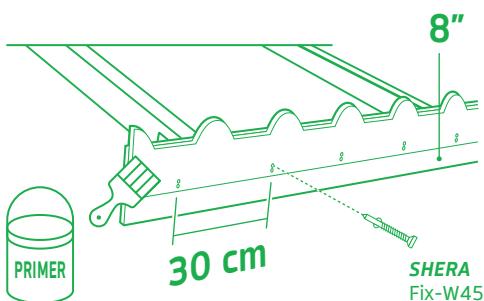


- 2 Prime uncolored SHERA Eaves Filler Unit prior to installation.
- 3 Fasten SHERA Eaves Filler Unit over SHERA 8" Eaves and screw the eaves together at every 30 cm.

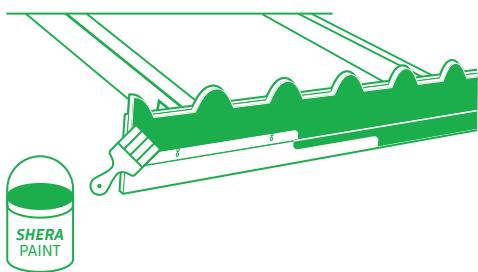


- 4 Caulk at all end joints and over the screw heads. Clean up before painting.

Handling & storage

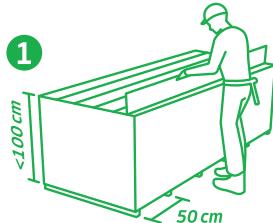

SHERA products should be handled and stacked carefully to avoid damages to their edges and corners.

The maximum height of stack is 1 meter with timber bearers supported at every 50 cm.

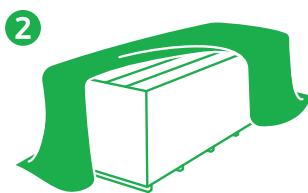

SHERA products should be stacked on dry and leveled ground.

It is recommended to store SHERA under shade to prevent damages that could occur to the product in case of prolonged exposure to high humidity environment prior to installation.



During a transfer, SHERA products should be handled at 50 cm from both ends.

The product should be lifted such that its side is parallel to the floor.

Avoid installing SHERA product under wet condition to reduce chance of cracking.

Tools and Equipment


SHERA Board



Fiber cement cutter



Electric screw driver

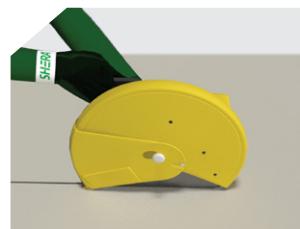

Electric saw



Cutter



SHERA Concrete Bonding Agent



SHERA cement jointing compound



SHERA flexible jointing compound



SHERA fiberglass mesh tape

SHERA Acrylic Jointing Compound
For interior work; used for plastering joints of SHERA Wall Board,
Recessed edge, together with SHERA fiberglass mesh tape.

SHERA Flexible Jointing Compound
Smooth ceiling plastering work
requiring high flexibility together
with fiberglass mesh tape

SHERA Fiberglass Mesh Tape
Used for taping the joints of
SHERA Wall Board, Inclined edge



SHERA sealant PU25

For sealing joints of interior
and exterior works

SHERA barrel gun

Used with Sealant
Size 310 and 600 ml.



SHERA screw fix - b

For steel structure
0.55-1.2 mm thick



SHERA screw fix - w

For steel structure
1-3.2 mm thick



SHERA screw fix - t

For wooden structure

Schedule of Recommended Fixing of SHERA BOARD with SHERA Screws

Structure Type	SHERA Screws to be used with SHERA BOARD having several thickness (mm)			
SHERA BOARD Thickness	3.2-6 mm.	6-8 mm.	10-12 mm.	15-20 mm.
Galvanized steel structure 0.55-1.0 mm thick	FIX-B20	FIX-W20	FIX-W25	Not recommended
Structural steel 1.0-3.2 mm thick	Not recommended	FIX-W25	FIX-W32	FIX-W45
Wooden structure	FIX-T11/4"	FIX-T11/4"	FIX-T11/4"	FIX-T11/4"

SHERA Wood



SHERA Plug

Perfect your floor without having to touch up screw heads with this new approach.

Packing : 250 pcs/box

SHERA Plug Consumption

Frame Spacing	SHERA Floor Plank Color Through	Area Coverage (m ² /box)
30 mm	25 x 150 x 3000 mm.	10
	25 x 200 x 3000 mm.	6.5
40 mm	25 x 150 x 3000 mm.	8
	25 x 200 x 3000 mm.	12.5



SHERA Flooring Clip-Lock Set

It is made for installing wood floor Clip-Lock models, to address all your needs. Whether applied on wood or steel structures, it is quick to install, and does not require touch-up paint on screwheads. The job is done easier and faster.

Packing : 36 pcs/box



SHERA Sealant PU 25

For jointing gaps

SHERA Product Packing 310/600 ml



SHERA Corner Piece, Smooth Texture

For internal and external wall cornering

Size (cm): 0.6 x 8 x 305



SHERA Barrel Gun

For using with SHERA Sealant PU 25
For both 310 ml and 600 ml



SHERA Acrylic Paint

Available for all colors for painting
screw heads and wood cutting

Packing 0.525 liter Application
quantity 10 sq.m./liter



SHERA Screw FIX-W

Screws for installing SHERA wood to wood
sub frame. Screw heads are embedded firmly
into the wood to create neater finish than
conventional screws.

Quality Class: 2

Length (inch): 1 ½ and 1 ¾

Diameter: No. 8

Packing

FIX-W32G8 = 500 pcs/box

FIX-W45G8 = 250 pcs/box



SHERA Screw FIX-T

Screws for installing SHERA wood to wood
sub frame. Screw heads are embedded
firmly into the wood to create neater finish
than conventional screws.

Quality Class: 2

Length (inch): 1 ½ and 1 ¾

Diameter: No. 8

Packing

FIX-T 1 ½ = 500 pcs/box

FIX-T 1 ¾ = 250 pcs/box

Characteristics of frames	SHERA Plank / SHERA Splendid Plank SHERA Skirt and SHERA Strip	SHERA Eaves (lower unit)	SHERA Eaves (upper unit)	SHERA Floor Plank and SHERA Décor Wood
Installation on steel frame	SHERA screws FIX-W32G8	SHERA screws FIX-W32G8	SHERA screws FIX-W45G8	SHERA screws FIX-W45G8
Installation on wood frame	SHERA screws FIX-T 1 ½"	SHERA screws FIX-T 1 ½"	SHERA screws FIX-T 1 ¾"	SHERA screws FIX-T 1 ¾"

SHERA Public Company Limited (Head Office)
2426/3 Mahaphant Building, Chareonkrung Road,
Bangkorlhaem, Bangkok 10120, Thailand

SHERA Vietnam CO.,LTD
Room 8.6, 8th Floor, Le MeridienBuilding,
3C Ton Duc Thang Street, Ben Nghe Ward,
Dist1, Ho Chi Minh City, Vietnam

SHERA Building Solution Indonesia
Gedung The City Tower Lantai 12 Suite 1-N,
Jl. MH. Thamrin No. 81, Kelurahan Menteng,
Kecamatan Menteng, Jakarta Pusat

SHERA call Center : +662 289 9888 F : +66 2 289 9800
E-mail : callcenter@shera.com

Colors of products shown in pictures may differ from the actual products due to printing system.
We reserve the right to modify any of the information in this document without prior notice.
Version : 2021

www.SHERA.com



Website : **SHERA**

SHERA Myanmar CO.,LTD
LOT. NO.FG-2, Nway Oo Kant Kaw Street,
Fontana Gardens FMI City,
Hlaing Tharyar Township, Yangon, Myanmar

SHERA Building Solutions India Private Limited
Smartworks, 1st Floor, Fleet House, Marol Naka,
Andheri Kurla Road, Andheri East, Mumbai-400059
Tel : +91 8097499099

SHERA Building Solution (Philippines) Corp.
Level 20-1, One Global Place,
5th Avenue & 25th Street, Bonifacio Global City,
Taguig 1632 Philippines